Python Inheritance

Table of contents

Syntax 1
`super()` 3
Terminology cheat-sheet 3
Polymorphism 4
When to use inheritance 4
Abstract base classes 4
Method Resolution Order (MRO) 5

Inheritance lets a class (the **subclass/child class**) reuse the attributes and methods of another class (the **superclass/parent class**), while adding new behaviour or overriding existing behaviour. It models an **"is-a"** relationship (a `DeliveryRobot` *is a* `Robot`) — contrast with python-composition[1]'s **"has-a"** relationship.

Syntax

```
class Parent():
    # Parent class' implementation

# inherit from the Parent class
class Child(Parent):
    # Child class' implementation
```

`Child` inherits everything `Parent` defines, without naming any of it.

A subclass automatically gets all of its parent's attributes and methods. It can:

- **Add** new methods/attributes that only it has.
- **Override** an inherited method by redefining it with the same name.

[1] courses/csse1001/python-composition.pdf

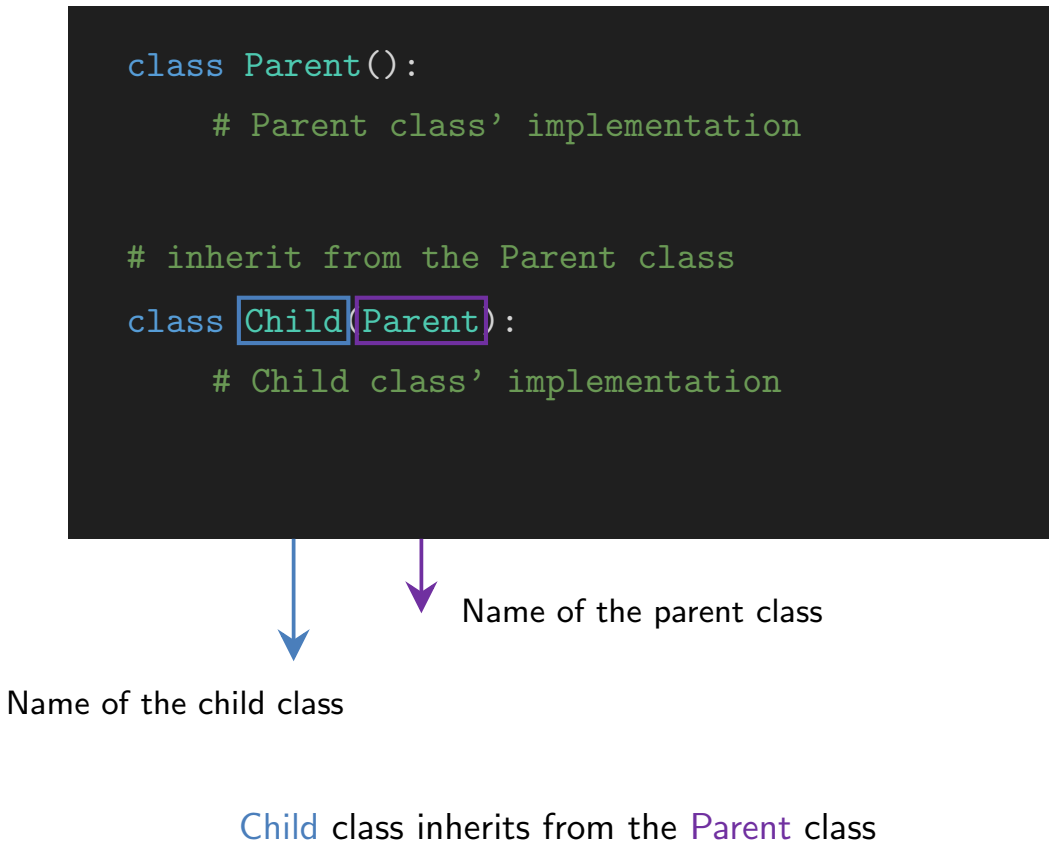

Figure 1: The `class Child(Parent):` line, annotated: the name being *defined* comes first, the name being *inherited from* goes in the parentheses. The box round each name, the arrow leading from it, and the matching word in the sentence beneath are all one colour: blue tracks the child and purple the parent throughout.

- **Extend** an inherited method using `super()`, rather than fully replacing it.

Those three, plus plain inheritance, are the four things a subclass can do with any given member:

The subclass…	…does this	Effect on the parent's version
says nothing about the member	**inherits** it	used unchanged
declares a member the parent doesn't have	**adds** it	none — the parent has no such member
declares a member with the same name	**overrides** it	shadowed; never runs for this class
declares it and calls `super()` inside	**extends** it	runs, plus whatever the subclass adds

A subclass that declares no `__init__` of its own uses the parent's, so constructing it takes the parent's arguments. Declaring one *replaces* the parent's — which is why an extending `__init__` almost always opens with `super().__init__(...)`.

`super()`

`super().method(...)` calls the *parent* class' version of a method — most commonly used inside an overridden `__init__` to reuse the parent's initialization logic before adding subclass-specific setup:

```
class DeliveryRobot(Robot):
    def __init__(self, name: str, batt_level: int, load_capacity: int):
        super().__init__(name, batt_level)   # reuse Robot's __init__
        self.load_capacity = load_capacity
```

Terminology cheat-sheet

Given `class Student(Person):`

Term	Refers to
subclass / child class	`Student`
superclass / parent class	`Person`
"`Student` inherits from / extends `Person`"	the relationship between them

Polymorphism

Polymorphism ("many forms") describes an interface that works across different underlying types. Built-ins like `len()` are polymorphic (works on strings, lists, dicts, …). Classes that share a method name (whether via a common superclass or just by convention) are also polymorphic: the same call, e.g. `r.charge()`, produces different behaviour depending on which actual class `r` is an instance of.

Which method actually runs is decided by the object, not by the calling code, and is resolved by walking up the hierarchy until the name is found: `object's own class → parent → grandparent → ...`. A subclass that overrides the name stops that walk at itself; one that doesn't lets it continue to the parent. Nothing in the caller has to know or ask which case it is — that is what makes a loop over a mixed list of subclasses work, and why adding another subclass later needs no change to the loop.

When to use inheritance

Only when there's a genuine **"is-a"** relationship between the two classes. If the relationship is really "has-a" (one object *contains* or *uses* another), prefer python-composition[2] instead. See 2025-09-23-inheritance[3] for the worked `Robot` hierarchy and 2025-09-23-composition[4] for the `DroneFlight` counter-example.

Abstract base classes

An **abstract base class** doesn't provide concrete implementations for some/all of its methods — it just defines the *interface* that every concrete subclass must implement. You're not meant to instantiate the abstract class directly.

The simplest (unenforced) version just raises an error from each method that subclasses must override:

```
class Shape:
    def area(self) -> float:
        raise NotImplementedError("Subclasses must implement area()")
```

This only fails when the unimplemented method is actually *called* — `Shape()` itself still succeeds. The standard-library `abc` module enforces this properly, raising `TypeError` at the point of instantiation:

[2] courses/csse1001/python-composition.pdf
[3] courses/csse1001/2025-09-23-inheritance.pdf
[4] courses/csse1001/2025-09-23-composition.pdf

```
from abc import ABC, abstractmethod

class Shape(ABC):
    @abstractmethod
    def area(self) -> float:
        ...

    # concrete helpers are still allowed alongside abstract methods
    def describe(self) -> str:
        return f"{self.__class__.__name__}"
```

With `ABC`, `Shape()` raises immediately: `TypeError: Can't instantiate abstract class Shape with abstract methods area`.

Method Resolution Order (MRO)

When a class inherits from multiple parents (or a chain of parents) that define the same method/attribute name, Python needs a deterministic rule for which one wins. That rule is the **Method Resolution Order (MRO)** — the order Python searches through classes to resolve a name on an object. It's stored on the class as `cls.__mro__` (or `cls.mro()`).

Python's inheritance models

- **Single inheritance**: `class B(A):` — one parent.
- **Multilevel inheritance**: `class C(B):` (where `B` itself inherits from `A`) — a linear chain; the MRO just follows the chain upward.
- **Hierarchical inheritance**: multiple children (`B`, `D`, …) inherit from the same parent `A`.
- **Multiple inheritance**: `class E(B, D):` — a class inherits from more than one parent directly.

The diamond problem and C3 linearisation

If `E(B, D)` and both `B` and `D` inherit from `A`, which version of `A`'s methods should `E` use? Python resolves this with **C3 linearisation**:

- Child classes are checked before parents.
- Parents are checked in the order they're listed in the class definition.
- If a class would appear more than once, only its *last* occurrence is kept.

```
>>> class E(B, D): pass
>>> [cls.__name__ for cls in E.__mro__]
['E', 'B', 'D', 'A', 'object']
```

Each attribute/method name is resolved independently by walking this list and taking the first class that defines it — so two different method calls on the same object can effectively "come from" two different classes in the hierarchy.

`super()` follows the MRO

`super()` doesn't call the immediate parent named in the `class` statement — it calls the *next class after the current one in the instance's actual MRO*. This is what makes cooperative multiple inheritance work: as long as every class in the chain calls `super()`, a single call can ripple through every class in the MRO exactly once, in order.

```
class A:
    def ping(self): print("A")
class B(A):
    def ping(self): print("B"); super().ping()
class C(A):
    def ping(self): print("C"); super().ping()
class D(B, C):
    def ping(self): print("D"); super().ping()
```

```
>>> D().ping()
D
B
C
A
```

If any class in the chain omits its `super()` call, the chain simply stops there for that call — the MRO itself doesn't change (it's purely a function of the class hierarchy), but fewer methods actually get executed.